
**Standard equipment**

- chassis on wheels
- side walls H-1700

**Total loading:** 500 kg

**Loading of the standard wire shelf:** 70 kg

**Loading of the reinforced wire shelf:** 100 kg

**Wheel:** polyamide 100 mm

**Standard finish:** zinc plated + lacquer

**Optional equipment**

- side wall H-1700, with identification board,
- side wall Securite H-1700,
- closed wall H-1700,
- bottom closed wall H-700,
- top closed wall H-700,
- standard wire shelf,
- reinforced wire shelf,
- corner bumpers,
- textile or rubber belt.

**POSSIBLE CONFIGURATIONS:**

*Container with side walls and belts*

*Container with securite side walls*

*Container with side walls, and closed wall H-1700*

*Container with side walls, and two closed walls H-1700*

*Container with side walls, and closed wall H-1700, with wire shelf*

*Container with side walls, closed wall H-1700, with top and bottom closed wall H-700*


**PRODUCT NAME**

Warehouse trolley 810x720 H1700

**FINISH**

zinc plated + lacquer

**INDEX**

919-351-470

**K ROLLCONTAINERS**

**Standard equipment:**


- chassis on wheels
- side walls H-1700



**Optional equipment:**

side wall H-1700, with identification board



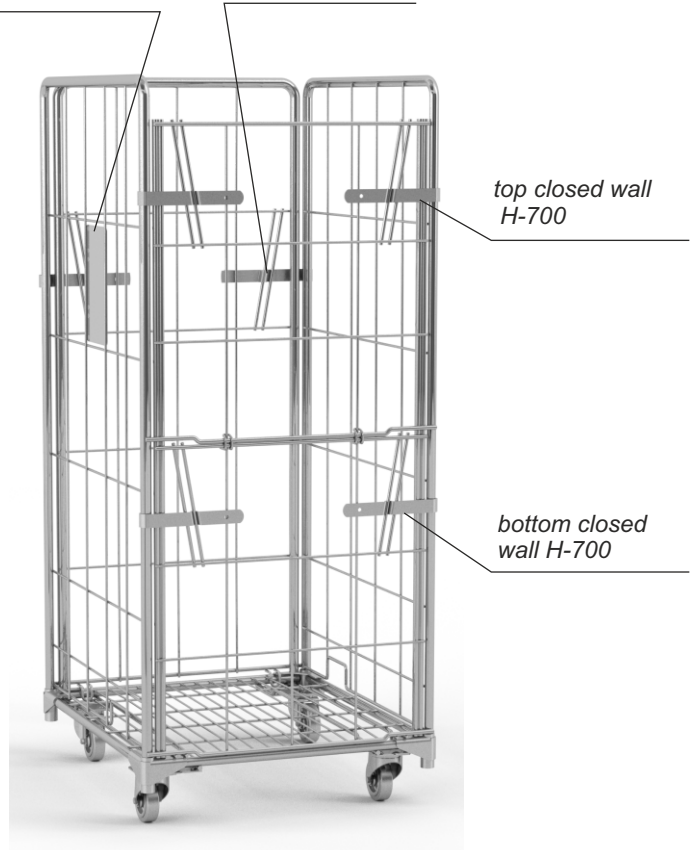


closed wall H-1700




top closed wall H-700

bottom closed wall H-700

**wheel types for container assembly:**

Wheel type	4 swivel wheels	4 swivel wheels, 2 wheels with the brakes	2 swivels wheels, 2 fixed wheels	2 swivel wheels with brake, 2 fixed wheels
 polypropylene Ø 100 mm	✓		✓	
 polyamide Ø 100 mm	✓	✓		✓
 polyamide Ø 125 mm	✓		✓	
 Rubber Ø 125 mm	✓	✓	✓	✓
 Sandwich Ø 125 mm			✓	✓

standard wire shelf

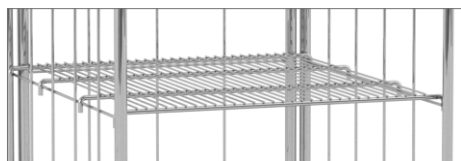

reinforced wire shelf




textile or rubber belt



corner bumpers



side wall Securite

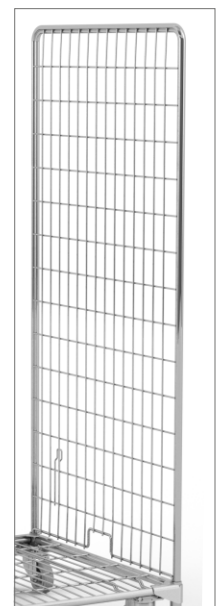

**K ROLLCONTAINERS**