

Standard equipment

- chassis on wheels
- side walls H-1900

Total loading: 500 kg

Loading of the standard wire shelf: 70 kg

Loading of the reinforced wire shelf: 100 kg

Wheel: polyamide 100 mm

Standard finish: zinc plated + lacquer

Optional equipment

- side wall H-1900, with identification board,
- side wall Securite H-1900,
- closed wall H-1900,
- bottom closed wall H-700,
- top closed wall H-700,
- standard wire shelf,
- reinforced wire shelf,
- corner bumpers,
- textile or rubber belt.

POSSIBLE CONFIGURATIONS:

Container with side walls and belts

Container with securite side walls

Container with side walls, and closed wall H-1900

Container with side walls, and two closed walls H-1900

Container with side walls, and closed wall H-1900, with wire shelf

Container with side walls, closed wall H-1900, with top and bottom closed wall H-700



PRODUCT NAME

Warehouse trolley 810x720 H1900

FINISH

zinc plated + lacquer

INDEX

919-351-470

K ROLLCONTAINERS

Standard equipment:


- chassis on wheels
- side walls H-1900



Optional equipment:

side wall H-1900, with identification board



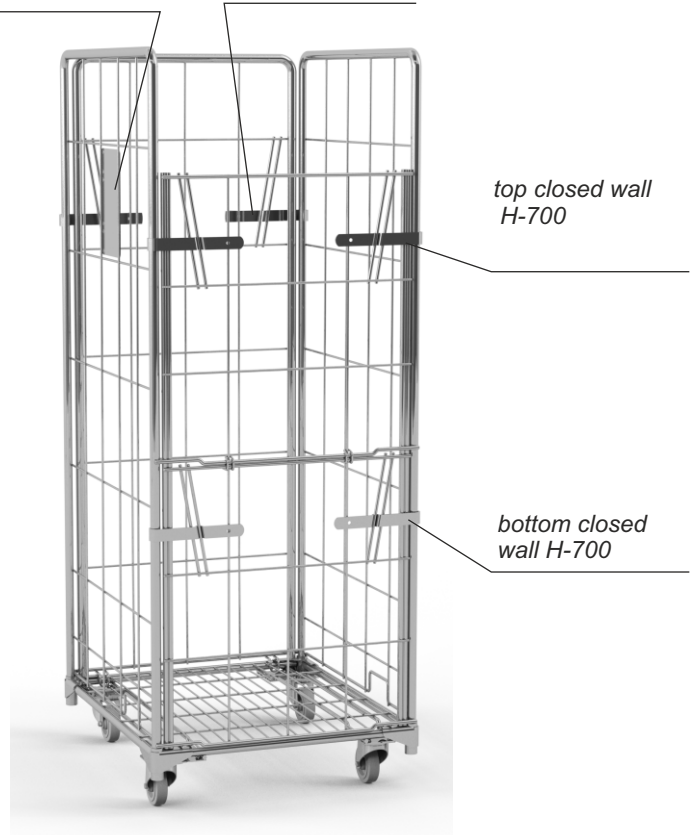


closed wall H-1900




top closed wall H-700

bottom closed wall H-700


wheel types for container assembly:

Wheel type	4 swivel wheels	4 swivel wheels, 2 wheels with the brakes	2 swivels wheels, 2 fixed wheels	2 swivel wheels with brake, 2 fixed wheels
 polypropylene Ø 100 mm	✓		✓	
 polyamide Ø 100 mm	✓	✓		✓
 polyamide Ø 125 mm	✓		✓	
 Rubber Ø 125 mm	✓	✓	✓	✓
 Sandwich Ø 125 mm			✓	✓

standard wire shelf

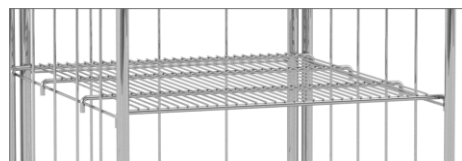

side wall Securite

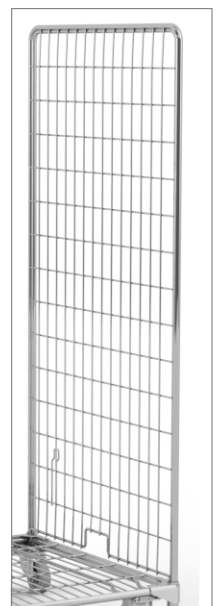

reinforced wire shelf



textile or rubber belt



corner bumpers



K ROLLCONTAINERS